

AENOR

Certificate of constancy of performance

CE
0099

0099/CPR/B85/0205

In compliance with Construction Products Regulation 305/2011/EU of the European Parliament and of the Council, of 9 March 2011, the notified body AENOR (n. 0099) has issued this certificate to

SUMCAB SPECIALCABLE GROUP, S.L.

registered office PI PLA DE LLERONA, CL GRAN BRETANYA, 29
08520 LES FRANQUESES DEL VALLÈS (Barcelona - España)

Certified performance Reaction to Fire of power electric cables for general applications in construction Works.

Harmonized Standard EN 50575:2014
EN 50575:2014/A1:2016

Designation Z10Z1-K
Trade Mark SUMSAVE (AS) - (00248)
Reaction to Fire Class Cca-s1a, d0, a1


See annex for more information.

Production site Code 25411

Certification scheme This certificate attests that all provisions under system 1+ concerning the assessment and verification of performance of the declared reaction to fire and its constancy described in Annex ZZ of the harmonized standard are applied.

This certificate will remain valid until its validity date, provided that the test methods and/or factory production control requirements included in the harmonised standard, used to assess the performance of the declared characteristics, do not change, and the product, and the manufacturing conditions in the plant are not modified significantly.

First issued on 2017-10-03
Validity date 2020-10-03

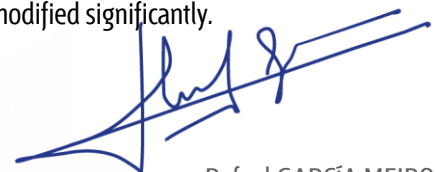

Rafael GARCÍA MEIRO
Chief Executive Officer

Original Electrónico

AENOR

Certificate of constancy of performance

0099/CPR/B85/0205

Annex to Certificate

Designation Z10Z1-K
Trade Mark SUMSAVE (AS) - (00248)
Reaction to Fire Class Cca-s1a, d0, a1

Cross-sectional Range	Rated Voltage
Conductor of 0,5 mm ² (n° of conductors: 2,3,4,5,6,7,8,10,12,14,16,18,20,33,34); Conductor of 0,75 mm ² (n° of conductors: 2,3,4,6,8,10); Conductor of 1 mm ² (n° of conductors: 2,3,4,5,6,8,10,12,16,20,24,30,36); Conductor of 1,5 mm ² (n° of conductors: 2,3,4,5,6,7,8,10,11,12,14,16,18,19,20,24); Conductor of 2,5 mm ² (n° of conductors: 2,3,4,7,10,13,14); Conductor of 4 mm ² (n° of conductors: 2,3,4,6); Conductor of 6 mm ² (n° of conductors: 2,4,5,7); Conductor of 10 mm ² (n° of conductors: 2,4); Conductor of 16 mm ² (n° of conductors: 2,4); 3x2,1 mm ² .	300 / 500 V

First issued on 2017-10-03
Validity date 2020-10-03